

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 March 2003 (27.03.2003)

PCT

(10) International Publication Number
WO 03/026291 A1

(51) International Patent Classification⁷: H04N 5/91, 5/445, 7/16, 7/173, G06F 3/00

(21) International Application Number: PCT/US02/29631

(22) International Filing Date:
18 September 2002 (18.09.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/960,196 20 September 2001 (20.09.2001) US

(71) Applicant: KEEN PERSONAL MEDIA, INC. [US/US];
One Morgan, Irvine, CA 92618 (US).

(72) Inventors: BOYLE, William, B.; 25901 Astor Way, Lake Forest, CA 92630 (US). PRICE, William, P.; 1101 S. Elliott Place, Santa Ana, CA 92704 (US).

(74) Agent: SHARA, Milad, G.; Western Digital Technologies, Inc., Intellectual Property Department, 20511 Lake Forest Drive, Lake Forest, CA 92630 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

REF. 3 DOCKET P4030207
CORRES. COUNTRY: _____
COUNTRY: PCT

(54) Title: COMMUNICATING A CHANNEL-CHANGE EVENT FROM A SET TOP BOX TO A DIGITAL VIDEO RECORDER

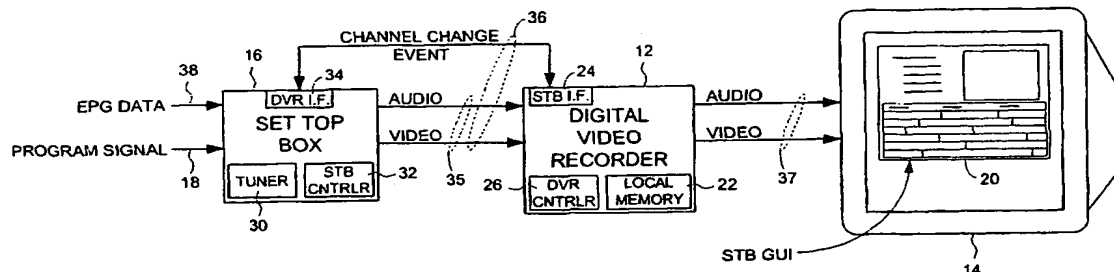

(57) Abstract: A digital video recorder (DVR 12) for use with a monitor (14) and a set top box (16), wherein the STB tunes to channels and comprises a DVR interface, wherein the DVR comprises a memory for storing program data from the STB, wherein the DVR controller communicates to the STB to tune to the available channels.

COMMUNICATING A CHANNEL-CHANGE EVENT FROM A SET TOP BOX TO A DIGITAL VIDEO RECORDER

Cross Reference to Related Applications and Patents

5 This application is related to co-pending U.S. patent application serial no. 09/652,730 filed on 08/31/200 entitled "ELECTRONIC PROGRAM GUIDE SUBSYSTEM FOR RECEIVING AND PROCESSING ELECTRONIC PROGRAM GUIDE INFORMATION FROM A SET-TOP BOX", the disclosure of which is herein incorporated by reference.

BACKGROUND OF THE INVENTION

10 Field of the Invention

 The present invention relates to digital video recorders. More particularly, the present invention relates to communicating a channel-change event from a set top box to a digital video recorder.

Description of the Prior Art

15 FIG. 1A shows a prior art digital video recorder or DVR 2 installed between a set top box or STB 4 (e.g., a tuner for digital cable) and a monitor 6. The STB 4 demodulates a selected channel from a program signal 5 and provides an audio and video (A/V) signal 7 to the DVR-2. The DVR 2 may record the A/V signal 7 for playback at a later time, or pass the A/V signal 7 through to the monitor 6 as A/V signal 9. The DVR 2 further comprises a
20 modem for receiving Electronic Program Guide (EPG) data over a telephone line 8. The user operates a remote control 10 to direct the DVR 2 to display the EPG data on the monitor 6 in a DVR graphical user interface (GUI). The user can peruse the EPG data in the DVR GUI to select various programs to view and/or record.

 The remote control 10 is also used to control the operation of the STB 4; that is, the
25 remote control 10 of the DVR 2 is intended to replace the remote control of the STB 4. Commands are sent from the DVR 2 to the STB 4 over a control line 12. For example, if the user selects a new channel with the remote control 10, the DVR 2 commands the STB 4 to

tune to the selected channel. In another example, if a program the user previously selected for recording begins to air, the DVR 2 directs the STB 4 to tune to the appropriate channel.

Although the remote control 10 of the DVR 2 is intended to replace that of the STB 4, the user can still control the operation of the STB 4 using its remote control. In addition, the user may operate the STB 4 (e.g., change the channel) by pressing buttons on the faceplate of the STB 4. Prior art DVRs have no way of knowing if the user has changed the channel by controlling the STB 4 directly which can disrupt the proper operation of the DVR 2.

There is, therefore, a need for a DVR capable of detecting when a user has changed a channel tuned by a STB.

10 SUMMARY OF THE INVENTION

The present invention may be regarded as a digital video recorder (DVR) for use with a monitor and a set top box (STB), the STB for demodulating program data by tuning to at least one of a plurality of channels and comprises a DVR interface. The DVR comprises a local memory for storing the program data received from the STB, and a STB interface for communicating with the STB over the DVR interface. The DVR further comprises a DVR controller for communicating control data to direct the STB to tune to a selected channel, and for receiving a channel-change event from the STB in connection with the STB changing the tuned channel.

In one embodiment, the channel-change event is received by the DVR after the STB changes the tuned channel. In another embodiment, the channel-change event is received by the DVR when a user directs the STB to change the tuned channel and before the STB changes the tuned channel. In still another embodiment, the DVR transmits a control signal to the STB authorizing the STB to change the tuned channel.

The present invention may also be regarded as a set top box (STB) for use with a monitor and a digital video recorder (DVR), the DVR comprising a STB interface. The STB comprising a tuner for demodulating program data by tuning to at least one of a plurality of channels, wherein the program data is communicated to the DVR for recording. The STB

further comprising a DVR interface for communicating with the DVR over the STB interface, and a STB controller. The STB controller for receiving control data from the DVR for directing the STB to tune to a selected channel, and for communicating a channel-change event to the DVR in connection with the STB changing the tuned channel.

5 The present invention may also be regarded as a computer program embodied on a computer readable storage medium for use in a digital video recorder (DVR), the DVR for use with a monitor and a set top box (STB). The STB for demodulating program data by tuning to at least one of a plurality of channels, and the DVR comprising a local memory. The computer program comprises code segments for receiving the program data from the STB,
10 and for storing the program data in the local memory. The computer program further comprises code segments for communicating control data to direct the STB to tune to a selected channel, and for receiving a channel-change event from the STB in connection with the STB changing the tuned channel.

 The present invention may also be regarded as a computer program embodied on a
15 computer readable storage medium for use in a set top box (STB), the STB for use with a monitor and a digital video recorder (DVR). The computer program comprises code segments for demodulating program data by tuning to at least one of a plurality of channels, and for communicating the program data to the DVR for recording. The computer program further
20 comprises code segments for receiving control data from the DVR for directing the STB to tune to a selected channel, and for communicating a channel-change event to the DVR in connection with the STB changing the tuned channel.

BRIEF DESCRIPTION OF THE DRAWINGS

 FIG. 1A shows a prior art DVR for use with a STB and a monitor, wherein the user interacts only with the DVR GUI which replaces the STB GUI.

25 FIG. 1B shows a STB and DVR according to an embodiment of the present invention wherein the STB communicates a channel change event to the DVR when the user controls the STB directly to change the channel.

FIGs. 2A and 2B show an embodiment of the present invention wherein a DVR communicates with the STB to coordinate whether the monitor displays the STB GUI or the DVR GUI.

FIG. 2C shows a DVR according to an embodiment of the present invention as comprising suitable circuitry for displaying the A/V signal received from the STB (including the STB GUI), or the A/V signal generated internally (including the DVR GUI).

FIG. 2D shows an embodiment of the present invention wherein the DVR receives electronic program guide (EPG) data over a dedicated communication channel.

FIG. 3A shows an embodiment of the present invention wherein a STB receives commands from a remote control and forwards the commands to the DVR when the DVR GUI is displayed on the monitor.

FIG. 3B shows an embodiment of the present invention wherein a DVR receives commands from a remote control and forwards the commands to the STB when the STB GUI is displayed on the monitor.

FIG. 4A is a state diagram illustrating an embodiment of the present invention wherein the DVR and STB cooperate to enable user interaction with both the STB menu and the DVR menu.

FIG. 4B is a state diagram illustrating an embodiment of the present invention wherein the STB transmits a channel-change event to the DVR whenever the user controls the STB directly to change the tuned channel.

FIG. 5 shows an embodiment of the present invention wherein a DVR comprises an A/V file system for storing A/V data.

FIG. 6 is a flow diagram according to an embodiment of the present invention wherein the STB receives a list of programs recorded as well as programs scheduled for recording from the DVR and uses the program lists to display EPG data in the STB GUI.

FIG. 7A shows an example STB GUI according to an embodiment of the present invention comprising a program guide having indicators of the programs recorded by the

DVR as well as programs scheduled for recording by the DVR.

FIG. 7B shows an example DVR GUI according to an embodiment of the present invention comprising options for manipulating the DVR and an option for displaying the STB GUI.

5 FIG. 8 shows an example STB GUI according to an embodiment of the present invention comprising an option for displaying the DVR GUI.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1B shows a digital video recorder (DVR) 12 for use with a monitor 14 and a set top box (STB) 16 according to an embodiment of the present. The STB 16 for demodulating
10 program data by tuning to at least one of a plurality of channels, and the STB 16 comprising a DVR interface 34. The DVR 12 comprises a local memory 22 for storing the program data received from the STB 16, and a STB interface 24 for communicating with the STB over the
DVR interface 34. The DVR 12 further comprises a DVR controller 26 for communicating control data to direct the STB to tune to a selected channel, and for receiving a channel-
15 change event from the STB 16 in connection with the STB 16 changing the tuned channel.

In one embodiment, the channel-change event is received by the DVR 12 after the STB 16 changes the tuned channel. In another embodiment, the channel-change event is received by the DVR 12 when a user directs the STB 16 to change the tuned channel and before the STB 16 changes the tuned channel. In still another embodiment, the DVR 12
20 transmits a control signal to the STB 16 authorizing the STB 16 to change the tuned channel. These embodiments are described in greater detail below with reference to FIG. 4B.

FIGs. 2A and 2B show a digital video recorder (DVR) 12 for use with a monitor 14 and a set top box (STB) 16 according to another embodiment of the present invention. The STB 16 for demodulating program data from a program signal 18 received over a
25 communication channel and for generating a STB graphical user interface (GUI) 20. The STB further comprises a DVR interface 34. The DVR 12 comprises a local memory 22 for storing the program data received from the STB 16, a STB interface 24 for communicating

with the STB 16 over the DVR interface 34, and a DVR controller 26. The DVR controller 26 for generating a DVR GUI 28 (FIG. 2B), and in response to user input, communicating with the STB 16 to coordinate whether the monitor 14 displays the STB GUI 20 (FIG. 2A) or the DVR GUI 28 (FIG. 2B).

5 In the embodiment of FIGs. 2A and 2B, the STB 16 comprises a tuner 30 for demodulating the program data from the program signal 18, and a STB controller 32 for generating the STB GUI 20 and for communicating with the DVR 12 to coordinate whether the STB GUI 20 or the DVR GUI 28 is displayed on the monitor 14.

The STB 16 may be a cable set top box for receiving cable signals, a satellite set top
10 box for receiving satellite signals, or any other similar device for receiving the program signal 18 carrying the modulated program data. The program signal 18 may be modulated at any suitable frequency, such as radio or optical frequencies, using any suitable modulation algorithm, such as quadrature amplitude modulation (QAM). The program signal 18 may be demodulated in continuous time wherein the modulated program data is transmitted in analog
15 form, or alternatively, in discrete-time wherein the modulated program data is transmitted in digital form. Further, any suitable compression algorithm may be employed to transmit the modulated program data, such as MPEG encoding.

In one embodiment, the DVR interface 24 and STB interface 34 implement a serial communication protocol, such as the Universal Serial Bus (USB) communication protocol.
20 However, the interfaces may implement any suitable digital communication protocol, such as the 1394 communication protocol.

In the embodiment of FIGs. 2A and 2B, the program data is communicated from the STB 16 to the DVR 12 as separate audio and video (A/V) signals 35 which may be analog or digital. In one embodiment, the A/V signal 35 is communicated via a dedicated interface
25 using a separate communication channel, and in an alternative embodiment the A/V signal 35 is communicated via the STB interface 34 and DVR interface 24 over a common communication channel, such as a 1394 communication channel, as indicated by the dashed

line 36 in FIGs. 2A and 2B.

The local memory 22 of the DVR 12 stores the program data (A/V signal 35) in digital form, and in one embodiment, in a compressed form such as MPEG. In one embodiment, the DVR 12 receives the A/V signal 35 in uncompressed form (analog or digital) and comprises
5 suitable circuitry for performing the desired compression before storing the program data in the local memory 22 in compressed form. In an alternative embodiment, the DVR 12 receives the program data in compressed form for storing directly to the local storage 22. In the embodiment of FIGs. 2A and 2B, the DVR 12 further comprises suitable circuitry for decompressing the program data into an internal A/V signal supplied to the monitor 14 during
10 play back.

FIG. 2C shows details of suitable circuitry implemented by the DVR 12 according to an embodiment of the present invention. The A/V signal 35 received from the STB 16 is encoded by encoder 21 (e.g., according to the well known MPEG format). The encoded program data 23 may be stored by the local storage 22 for playback at a later time. A
15 multiplexer 25 selects between the real-time encoded program data 23 or program data 27 stored by the local memory 22, and the selected program data is decoded by decoder 29. The DVR controller 26 comprises an on-screen display module (OSD) 31 for generating the DVR GUI 28 in a layered manner, including an A/V layer comprising the decoded A/V signal 33 output by decoder 29. An adder 41 adds the decoded A/V signal 33 with the GUI data output
20 by the OSD 31 to generate an A/V signal 43 representing the DVR GUI 28. A multiplexer 45 selects between the A/V signal 35 received from the STB 16, the decoded A/V signal 33 output by decoder 29, and the A/V signal 43 representing the DVR GUI 28. The multiplexer 45 outputs the A/V signal 37 supplied to the monitor 14. When the user selects the A/V signal 35 from the STB for display on the monitor 14 (including the STB GUI 20), the
25 multiplexer 45 selects the A/V signal 35 received from the STB 16. When the user selects the DVR GUI 28 for display on the monitor 14, the multiplexer 45 selects the A/V signal 43 representing the DVR GUI 28. When the user selects recorded program data for display on

the monitor 14, the multiplexer selects the decoded A/V signal 33 output by the decoder 29. The DVR 12 may continue to record the A/V signal 35 received from STB 16 independent of the user's selection as to which A/V signal is displayed on the monitor 14. This enables various trick-play features, such as pausing a real-time program.

5 In one embodiment the STB 16 transmits a control signal to the DVR 12 requesting "focus" of the monitor 14 when the user selects the STB GUI 20 be displayed. In this manner the DVR 12 will select the A/V signal 35 from the STB 16 for display on the monitor 14 rather than the A/V signal 33 or 43 generated internally by the DVR 12.

10 In the embodiment of FIGs. 2A and 2B, the STB 16 receives Electronic Program Guide (EPG) data 38 for use in rendering at least one of the STB GUI 20 and the DVR GUI 28. The EPG data 38 is digital data that may be sent to the STB 16 over a dedicated channel (e.g., over a telephone or cable modem, Ethernet, or other network channel) or over the same channel as the program signal 18 carrying the modulated program data. In one embodiment the EPG data 38 is communicated to the DVR 12 over the STB interface 34 and DVR
15 interface 24. The DVR 12 uses the EPG data to render the DVR GUI as described in greater detail in the above referenced patent application entitled "ELECTRONIC PROGRAM GUIDE SUBSYSTEM FOR RECEIVING AND PROCESSING ELECTRONIC PROGRAM GUIDE INFORMATION FROM A SET-TOP BOX". In an alternative embodiment illustrated in FIG. 2D, the DVR 12 comprises suitable circuitry for receiving the EPG data
20 over a dedicated communication channel 49 (e.g., over a telephone or cable modem, Ethernet, or other network channel).

FIG. 3A shows an embodiment of the present invention wherein the STB 16 receives a command representing the user input from a remote control 40 (e.g., via an infrared interface). When the STB GUI 20 is displayed on the monitor 14, the STB 16 processes the command
25 received from the remote control 40, and when the DVR GUI 28 is displayed on the monitor 14, the STB 16 communicates the command received from the remote control 40 to the DVR 12. In an alternative embodiment shown in FIG. 3B, the DVR 12 receives a command

representing the user input from a remote control 40. When the DVR GUI 28 is displayed on the monitor 14, the DVR 12 processes the command received from the remote control 40, and when the STB GUI 20 is displayed on the monitor 14, the DVR 12 communicates the command received from the remote control 40 to the STB 16.

5 FIG. 4A is a state diagram illustrating an embodiment of the present invention wherein the DVR and STB cooperate to enable user interaction with both the STB GUI and the DVR GUI. When the system is initialized (powered on), the initial state 42 transmits a command to the DVR 12 to configure the DVR 12 so that the A/V signal 35 from the STB 16 is displayed on the monitor 14. The system then enters state 44 indicating that the STB 16 has focus of the
10 monitor 14. At state 46 the system waits for user input (e.g., from the remote control 40). When user input is received, the system enters state 48 to evaluate the system mode. If the STB 16 currently has focus of the monitor 14, then at state 50 the user input is evaluated to determine whether the user has selected the option to display the DVR GUI. If not, the STB 16 processes the user input at state 52 to perform the appropriate STB function (e.g., change
15 the tuned channel).

 If at state 50 the user input indicates the user desires the DVR GUI to be displayed, then a command is sent to the DVR 12 so that the A/V signal generated internal to the DVR 12 (including the DVR GUI) is displayed on the monitor 14. That is, focus of the monitor 14 is transferred to the DVR 12 at state 54.

20 If at state 48 the DVR 12 has focus of the monitor 14, then the user input is communicated from the STB 16 to the DVR 12 for processing. At state 56 the user input is evaluated to determine whether the user has selected the option to display the STB GUI. If not, the DVR 12 processes the user input at state 58 to perform the appropriate DVR function. The system then returns to state 46 to wait for more user input.

25 If at state 56 the user input indicates the user has selected the option to display the STB GUI, then the DVR 12 is configured to display the A/V signal 35 from the STB 16 and a command is communicated to the STB 16 to display the STB GUI. The system then enters

state 44 indicating that the STB 16 has focus of the monitor 14.

FIG. 4B is a state diagram illustrating an embodiment of the present invention wherein the STB 16 transmits a channel-change event to the DVR 12 whenever the user controls the STB 16 directly to change the tuned channel. The state diagram of FIG. 4B is essentially the same as the state diagram of FIG. 4A with an additional state 60 which transmits the channel-change event from the STB 16 to the DVR 12 in connection with the STB 16 changing the tuned channel. In one embodiment, the channel-change event is transmitted to the DVR 12 before the STB 16 actually changes the tuned channel. In this manner, the DVR 12 can warn the user that changing the tuned channel will affect the operation of the DVR 12, allowing the user to abort the operation if desired. In this embodiment, the DVR 12 transmits a control signal to the STB 16 authorizing the STB 16 to change the tuned channel (or abort the operation).

In one embodiment, the DVR 12 comprises a plurality of program identifiers. The DVR 12 communicates to the STB 16 the plurality of program identifiers independent of when the STB 16 demodulates the program data identified by the plurality of program identifiers. The STB 16 is responsive to the plurality of program identifiers to modify at least one selected operation of the STB 16. In one embodiment, the plurality of program identifiers identify respective programs scheduled for recording by the DVR 12. In another embodiment, the plurality of program identifiers identify respective programs already recorded by the DVR 12. In one embodiment, the STB 16 uses the plurality of program identifiers to display the STB GUI, and in one embodiment, to display the EPG data. In another embodiment, the STB 16 uses the plurality of program identifiers to demodulate the program data identified by the program identifiers.

FIG. 5 shows an embodiment wherein a DVR 51 comprises an A/V file system 53 for storing the A/V data. The STB 16 retrieves the plurality of program identifiers from the DVR 51 by accessing the A/V file system 53.

In another embodiment, the DVR 12 receives from the STB 16 information identifying

a program selected by the user from the STB GUI. The DVR 12 modifies the plurality of program indicators in response to the program selected by the user from the STB GUI.

FIG. 6 is a flow diagram illustrating the aforementioned embodiments. At step 62 the system waits until the user selects the option to display the STB GUI. At step 64 the STB 16 receives EPG data from a communication channel (e.g., over the same channel as the modulated program data or over a dedicated communication channel). At step 66 the STB 16 receives from the DVR 12 the plurality of program identifiers. At step 68 the STB 16 renders the STB GUI using the EPG data and the plurality of program identifiers received from the DVR 12, and at step 70 the STB GUI is displayed on the monitor 14. If at step 72 the user selects a program to record from the STB GUI, then at step 74 the EPG data identifying the selected program is transmitted to the DVR 12 and the DVR 12 updates the plurality of program identifiers so that the selected program will be recorded. Control then loops back to step 66 so that the STB GUI is updated to reflect the user's selection to record the program. The procedure exits when at step 76 the user elects to exit the STB GUI.

FIG. 7A shows a program guide displayed as part of a STB GUI according to an embodiment of the present invention. The program guide comprises a plurality of program identifiers for identifying programs broadcast on respective channels relative to the time of day (information derived from the EPG data). In addition, the program guide comprises recording indicators for identifying programs that have been recorded and programs scheduled for recording by the DVR 12. In one embodiment, the recording indicators are derived from the program identifiers received from the DVR 12. Displaying the program guide together with the recording indicators is not limited to the STB GUI; the program guide may be rendered by any suitable video component capable of processing EPG data, such as the DVR 12 or the monitor 14.

In the example of FIG. 7A, the time of day is 9:15pm. The program "Jack and June" has been recorded as indicated by the icon 78 comprising two filled circles. The program "Sports in Review" is currently being recorded as indicated by the icon 80 comprising a filled

circle and an empty circle. The program "GO Fast" is scheduled for recording starting at 9:30pm as indicated by the icon 82 comprising two empty circles. This modification enhances the program guide by providing the user with program recording information together with the program guide information. Otherwise the user must exit the program guide and display another menu (e.g., a DVR menu) to view the program recording information which is inconvenient.

FIG. 7B shows an example DVR GUI according to an embodiment of the present invention. The DVR GUI comprises an advertisement 84 and five user selectable options. The "What's on TV" option 86 displays a menu of programs currently being broadcast together with the prerecorded programs in a user preferred format. The "My Recordings" option 88 displays a menu of recorded shows together with EPG data such as the actors, director, and brief synopsis of each program. The "Program Guide" option 90 returns the user to the STB GUI (e.g., the STB GUI of FIG. 7A). The "Select Programs to Record" option 92 displays a menu that enables the user to search for programs to record. For example, the user may search for all "comedy" programs wherein the DVR GUI will display a list of all comedies broadcast over the available channels (as determined from the EPG data). The "Setup" option 94 displays a menu allowing the user to configure the DVR 12 (e.g., display movies in wide-screen or standard format).

FIG. 8 shows a STB GUI according to an alternative embodiment of the present invention. In this embodiment, the STB GUI comprises an option 96 for displaying the DVR GUI (e.g., the DVR GUI of FIG. 7B). In one embodiment, selecting the option 96 from the STB GUI is the only way to access the DVR GUI. In this manner, the user must go through the STB GUI to reach the DVR GUI ensuring that the content of the STB GUI (including advertising content) is always displayed to the user.

In another embodiment, the remote control 40 (FIG. 3A or 3B) for generating the user input comprises a first button for selecting the STB GUI to be displayed on the monitor 14 and a second button for selecting the DVR GUI to be displayed on the monitor 14. This

embodiment allows the user to quickly switch between the two GUIs by selecting the appropriate buttons on the remote control 40. Referring again to FIG. 3A, when the user presses the button to display the STB GUI, the STB 16 communicates a command to the DVR 12 requesting focus of the monitor 14 so that the DVR will display the A/V signal 35 generated by the STB 16, including the embedded STB GUI. When the user presses the button to display the DVR GUI, the STB 16 communicates a command to the DVR 12 directing it to take focus of the monitor 14 by displaying its internal A/V signal (e.g., A/V signal 43 of FIG. 2C), including the embedded DVR GUI.

In one embodiment, the DVR 12 executes a computer program embodied on a computer readable storage medium (e.g., local memory 22). The computer program comprises code segments for receiving the program data from the STB 16, and for storing the program data in the local memory 22. The computer program further comprises code segments for communicating control data to direct the STB 16 to tune to a selected channel, and for receiving a channel-change event from the STB 16 in connection with the STB 16 changing the tuned channel.

In another embodiment, the STB 16 executes a computer program embodied on a computer readable storage medium (e.g., a non-volatile semiconductor memory connected to the STB controller 32). The computer program comprises code segments for demodulating program data by tuning to at least one of a plurality of channels, and for communicating the program data to the DVR 12 for recording. The computer program further comprises code segments for receiving control data from the DVR 12 for directing the STB 16 to tune to a selected channel, and for communicating a channel-change event to the DVR 12 in connection with the STB 16 changing the tuned channel.

WE CLAIM:

1. A digital video recorder (DVR) for use with a monitor and a set top box (STB), the STB for demodulating program data by tuning to at least one of a plurality of channels, the STB comprising a DVR interface, the DVR comprising
 - (a) a local memory for storing the program data received from the STB;
 - (b) a STB interface for communicating with the STB over the DVR interface; and
 - (c) a DVR controller for:
 - communicating control data to direct the STB to tune to a selected channel; and
 - receiving a channel-change event from the STB in connection with the STB changing the tuned channel.
2. The DVR as recited in claim 1, wherein the channel-change event is received by the DVR after the STB changes the tuned channel.
3. The DVR as recited in claim 1, wherein the channel-change event is received by the DVR when a user directs the STB to change the tuned channel and before the STB changes the tuned channel.
4. The DVR as recited in claim 2, wherein the DVR transmits a control signal to the STB authorizing the STB to change the tuned channel.

1 5. A Set Top Box (STB) for use with a monitor and a digital video recorder (DVR), the
2 DVR comprising a STB interface, the STB comprising:

3 (a) a tuner for demodulating program data by tuning to at least one of a plurality of
4 channels, wherein the program data is communicated to the DVR for recording;

5 (b) a DVR interface for communicating with the DVR over the STB interface; and

6 (c) a STB controller for:

7 receiving control data from the DVR for directing the STB to tune to a selected
8 channel; and

9 communicating a channel-change event to the DVR in connection with the STB
10 changing the tuned channel.

1 6. The STB as recited in claim 5, wherein the STB communicates the channel-change
2 event to the DVR after the STB changes the tuned channel.

1 7. The STB as recited in claim 5, wherein the STB communicates the channel-change
2 event to the DVR when a user directs the STB to change the tuned channel and before
3 the STB changes the tuned channel.

1 8. The STB as recited in claim 6, wherein the STB receives a control signal from the
2 DVR authorizing the STB to change the tuned channel.

- 1 9. A computer program embodied on a computer readable storage medium for use in a
2 digital video recorder (DVR), the DVR for use with a monitor and a set top box
3 (STB), the STB for demodulating program data by tuning to at least one of a plurality
4 of channels, the DVR comprising a local memory, the computer program comprising
5 code segments for:
6 (a) receiving the program data from the STB;
7 (b) storing the program data in the local memory;
8 (c) communicating control data to direct the STB to tune to a selected channel; and
9 (d) receiving a channel-change event from the STB in connection with the STB
10 changing the tuned channel.

- 1 10. A computer program embodied on a computer readable storage medium for use in a
2 set top box (STB), the STB for use with a monitor and a digital video recorder (DVR),
3 the computer program comprising code segments for:
4 (a) demodulating program data by tuning to at least one of a plurality of channels;
5 (b) communicating the program data to the DVR for recording;
6 (c) receiving control data from the DVR for directing the STB to tune to a selected
7 channel; and
8 (d) communicating a channel-change event to the DVR in connection with the STB
9 changing the tuned channel.

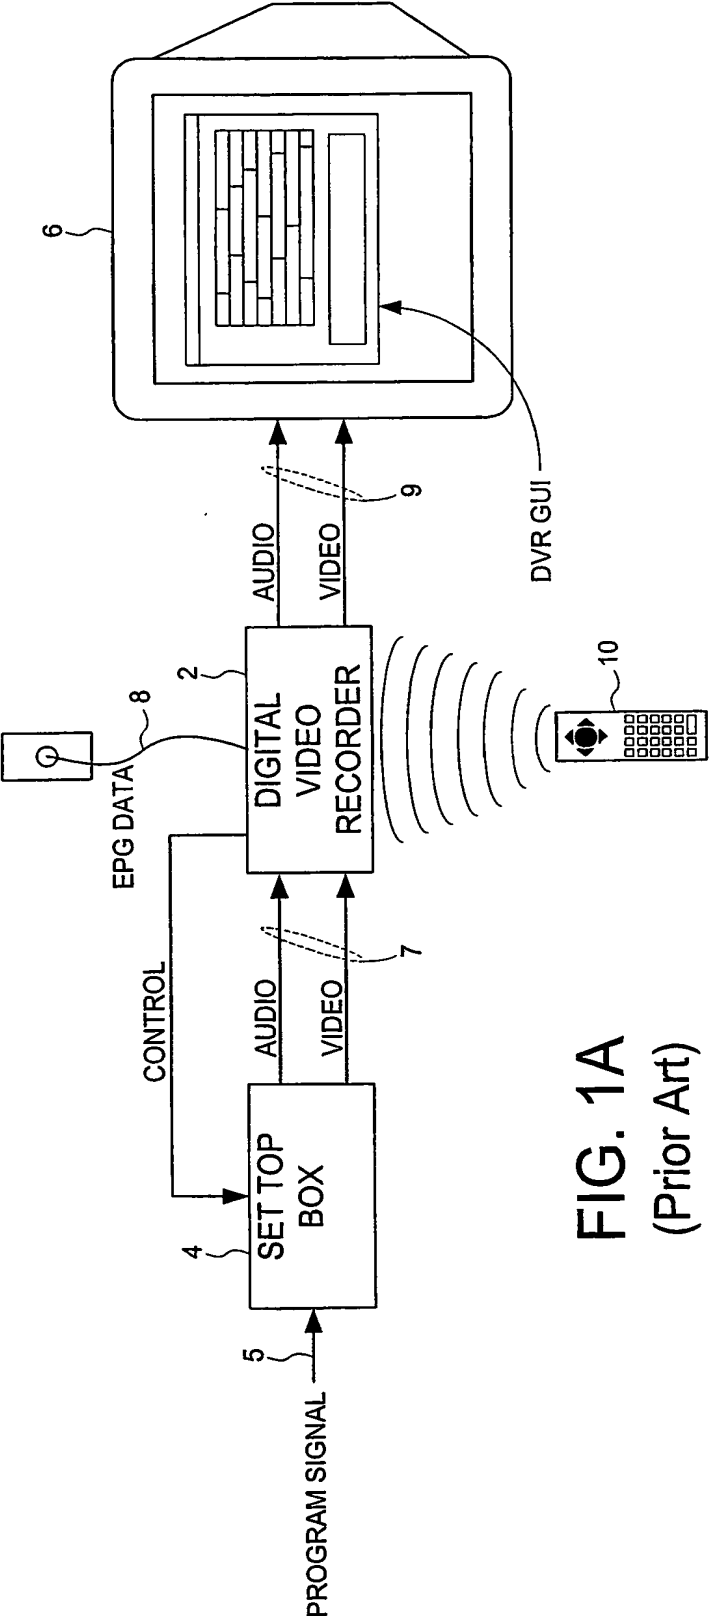


FIG. 1A
(Prior Art)

2/13

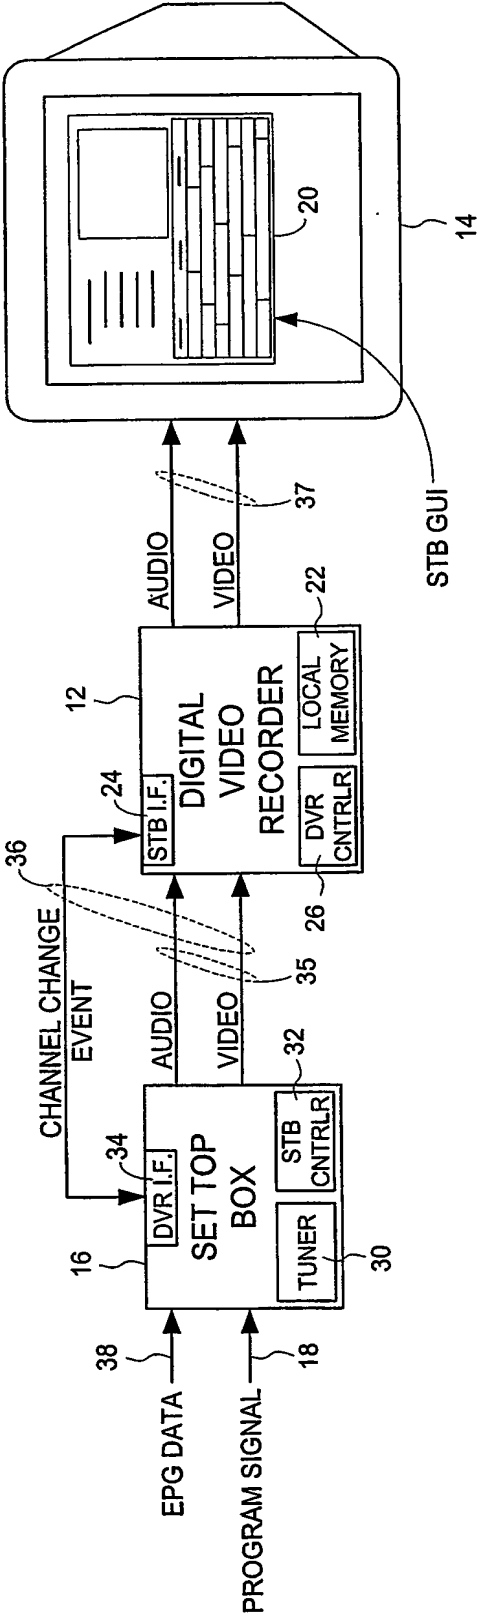


FIG. 1B

3/13

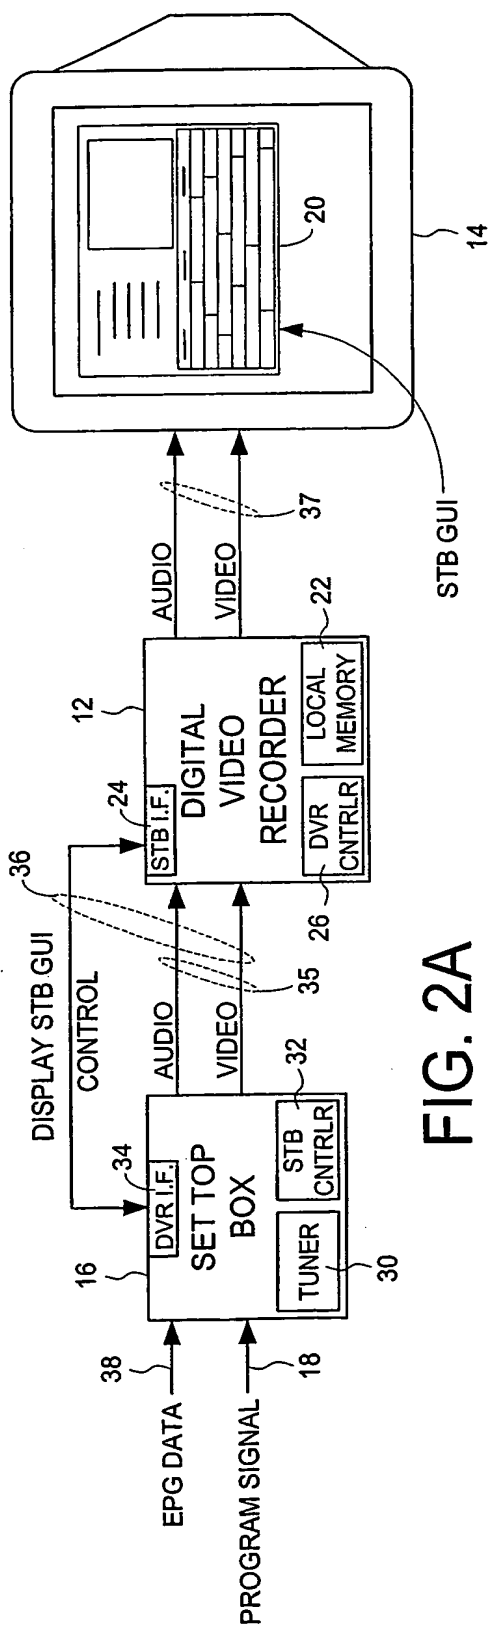


FIG. 2A

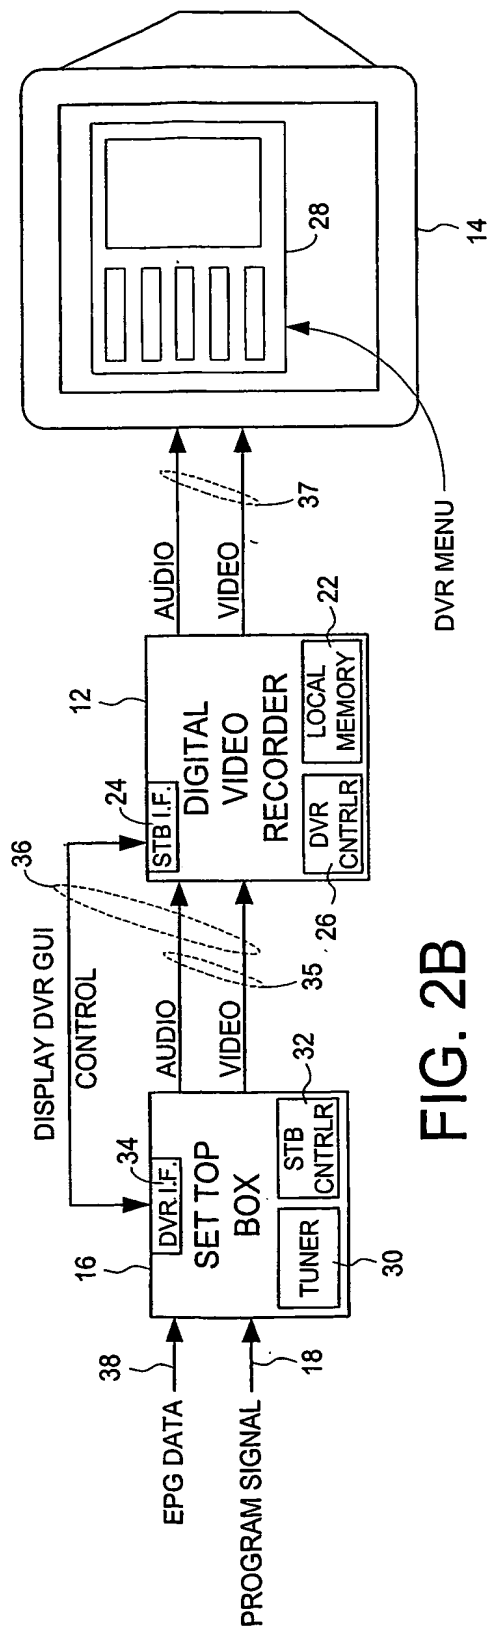


FIG. 2B

4/13

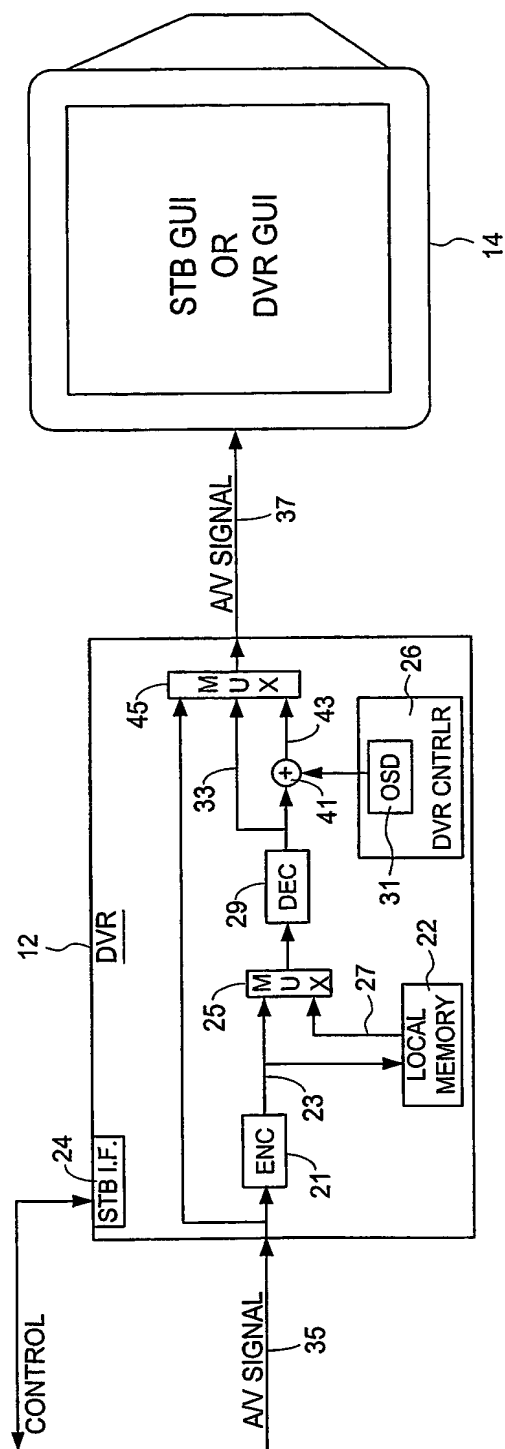


FIG. 2C

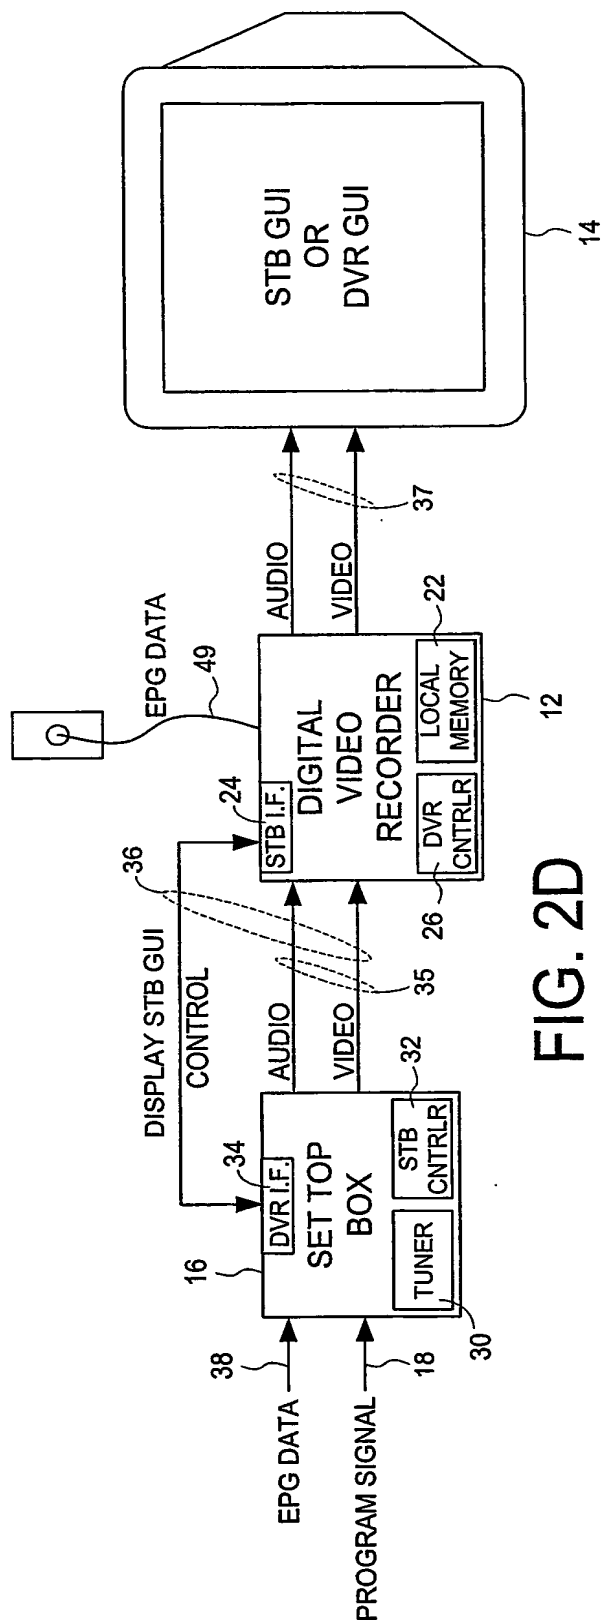


FIG. 2D

5/13

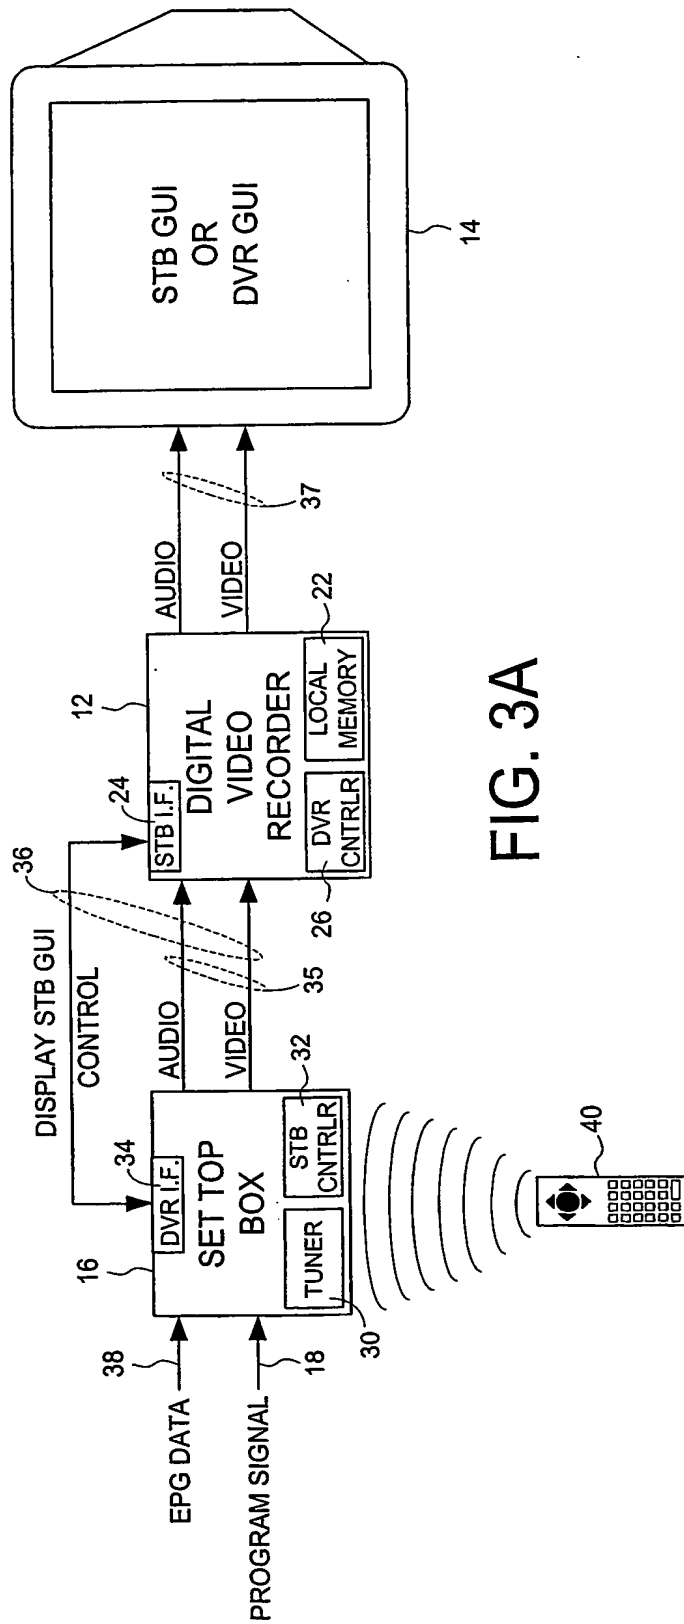


FIG. 3A

6/13

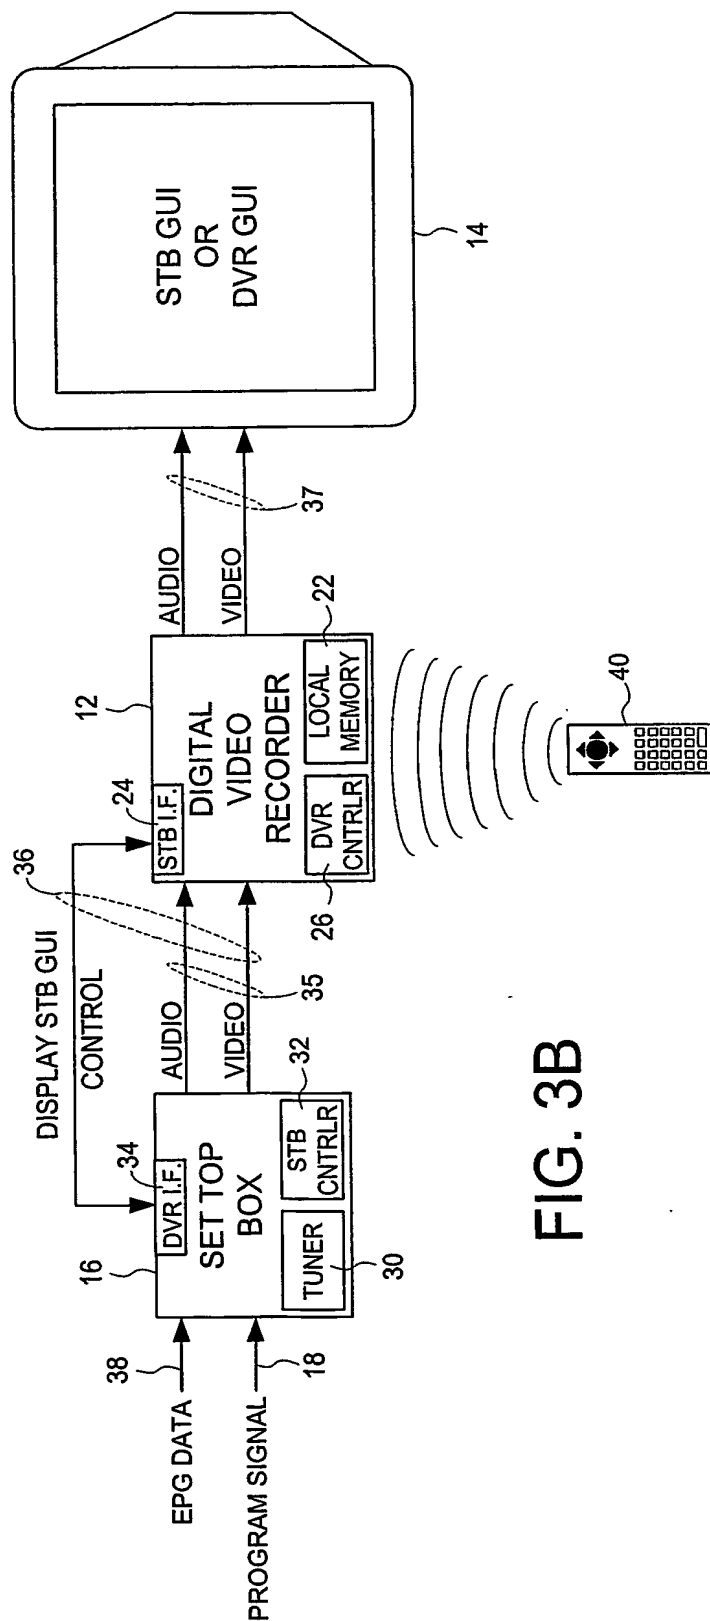


FIG. 3B

7/13

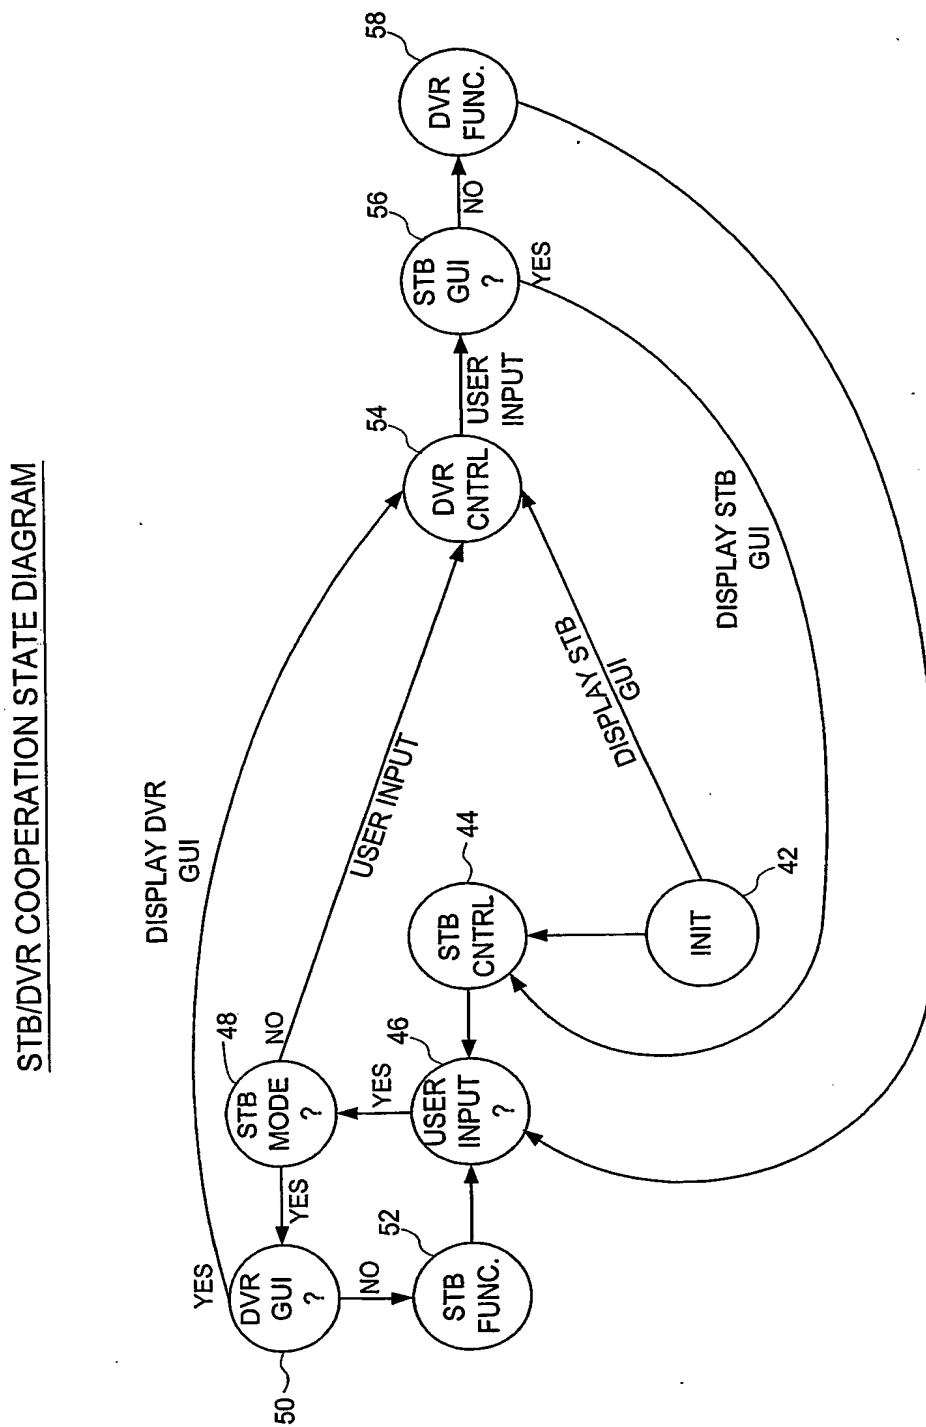


FIG. 4A

STB/DVR COOPERATION STATE DIAGRAM

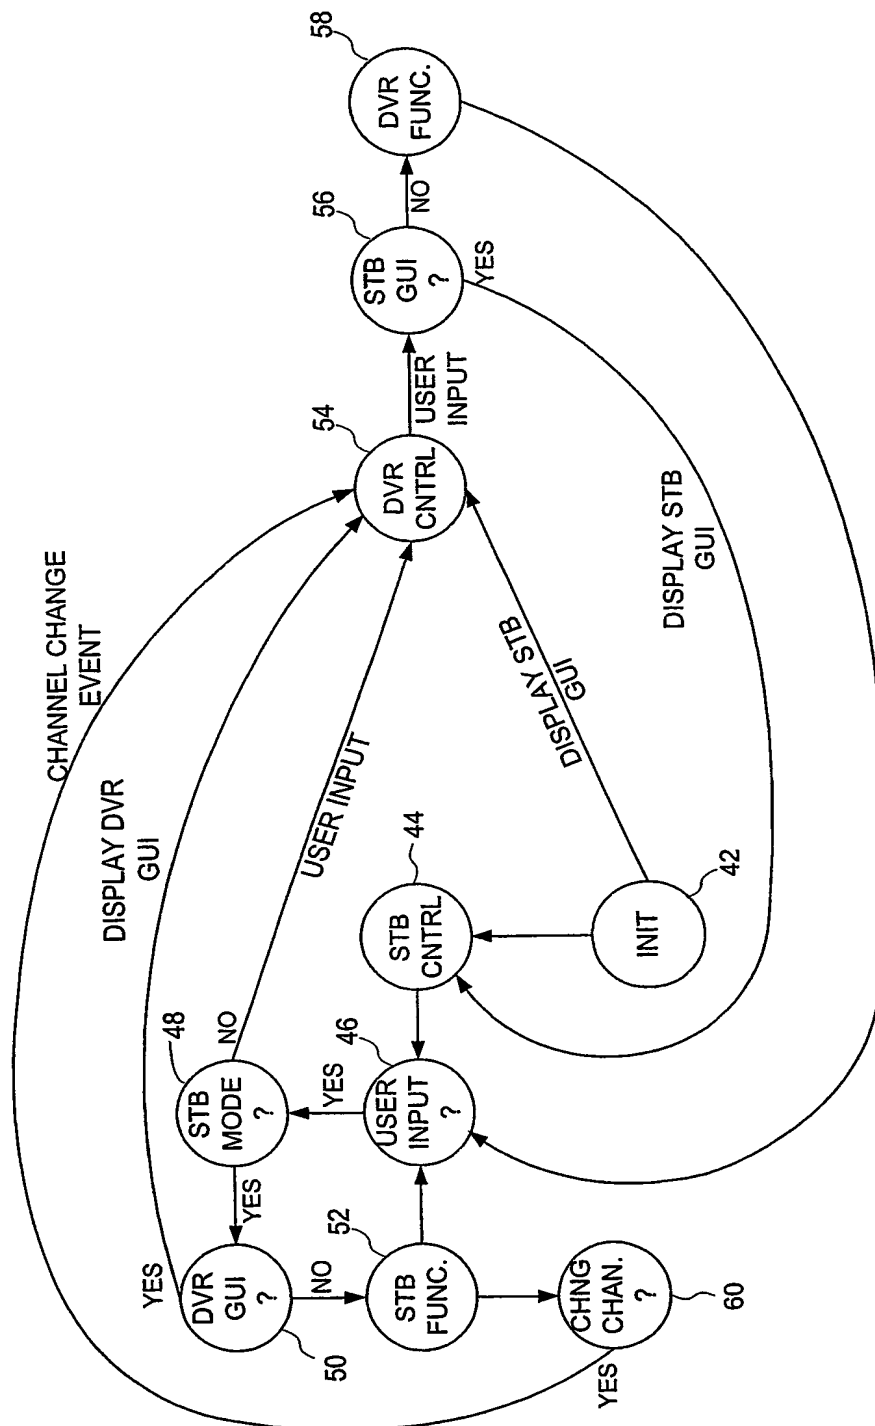


FIG. 4B

9/13

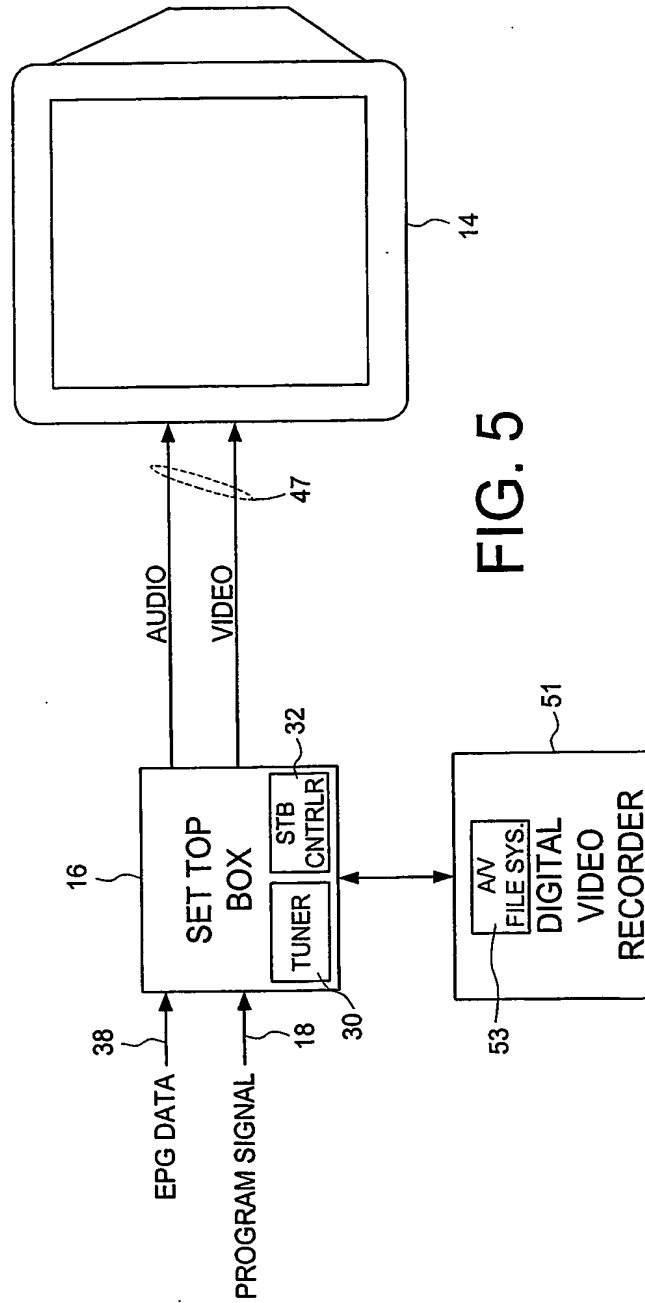


FIG. 5

10/13

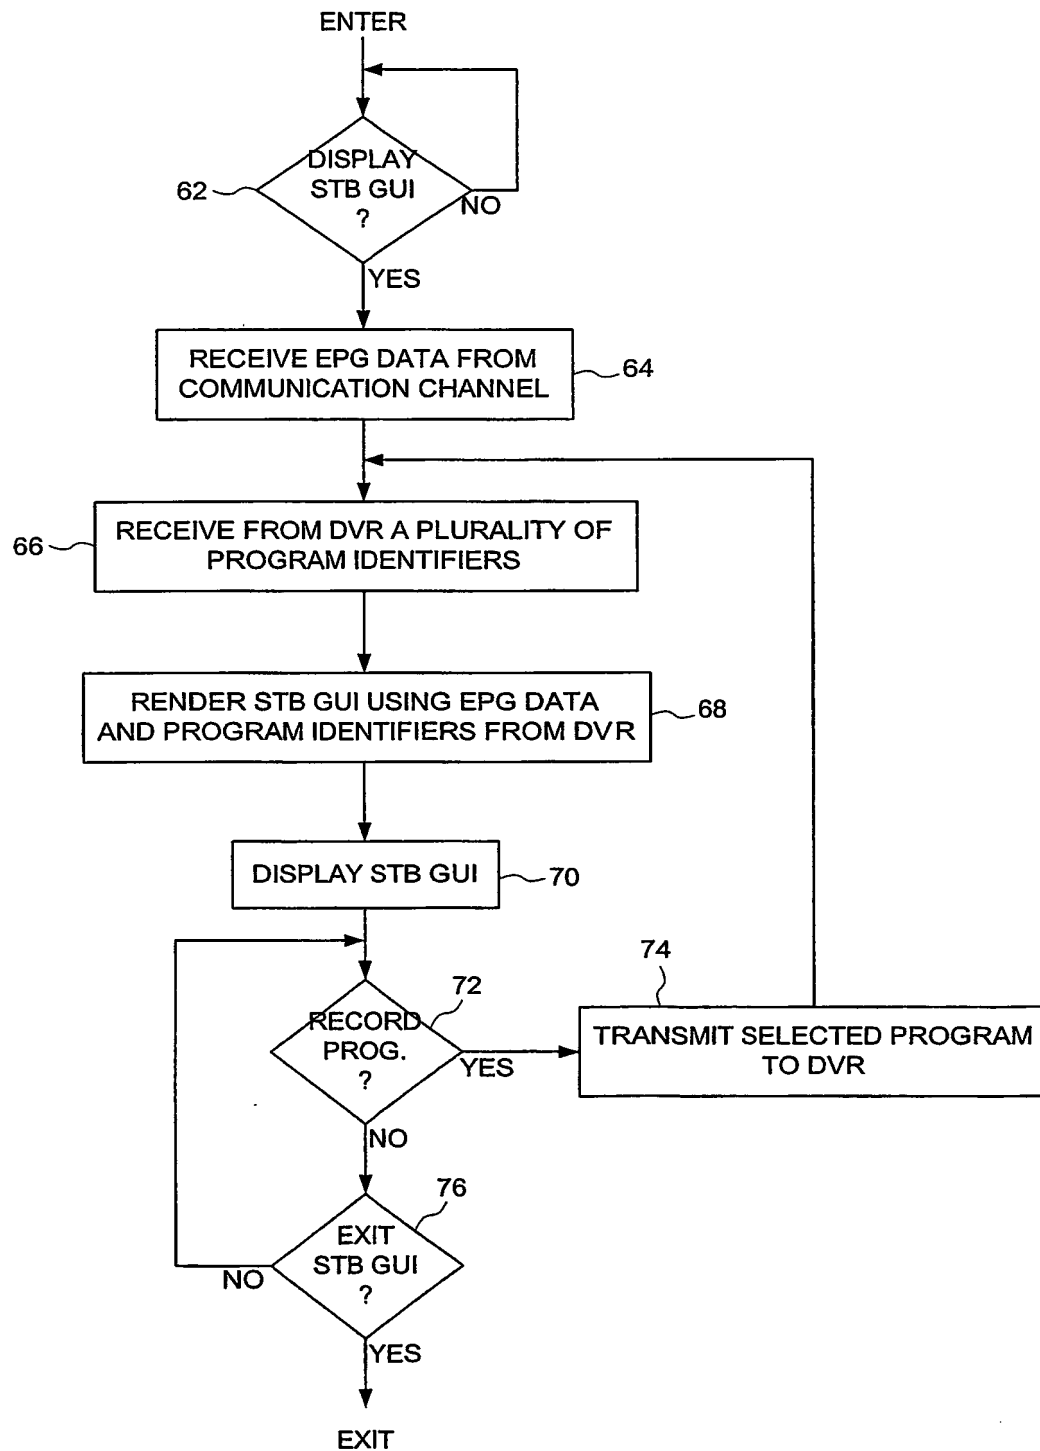


FIG. 6

11/13

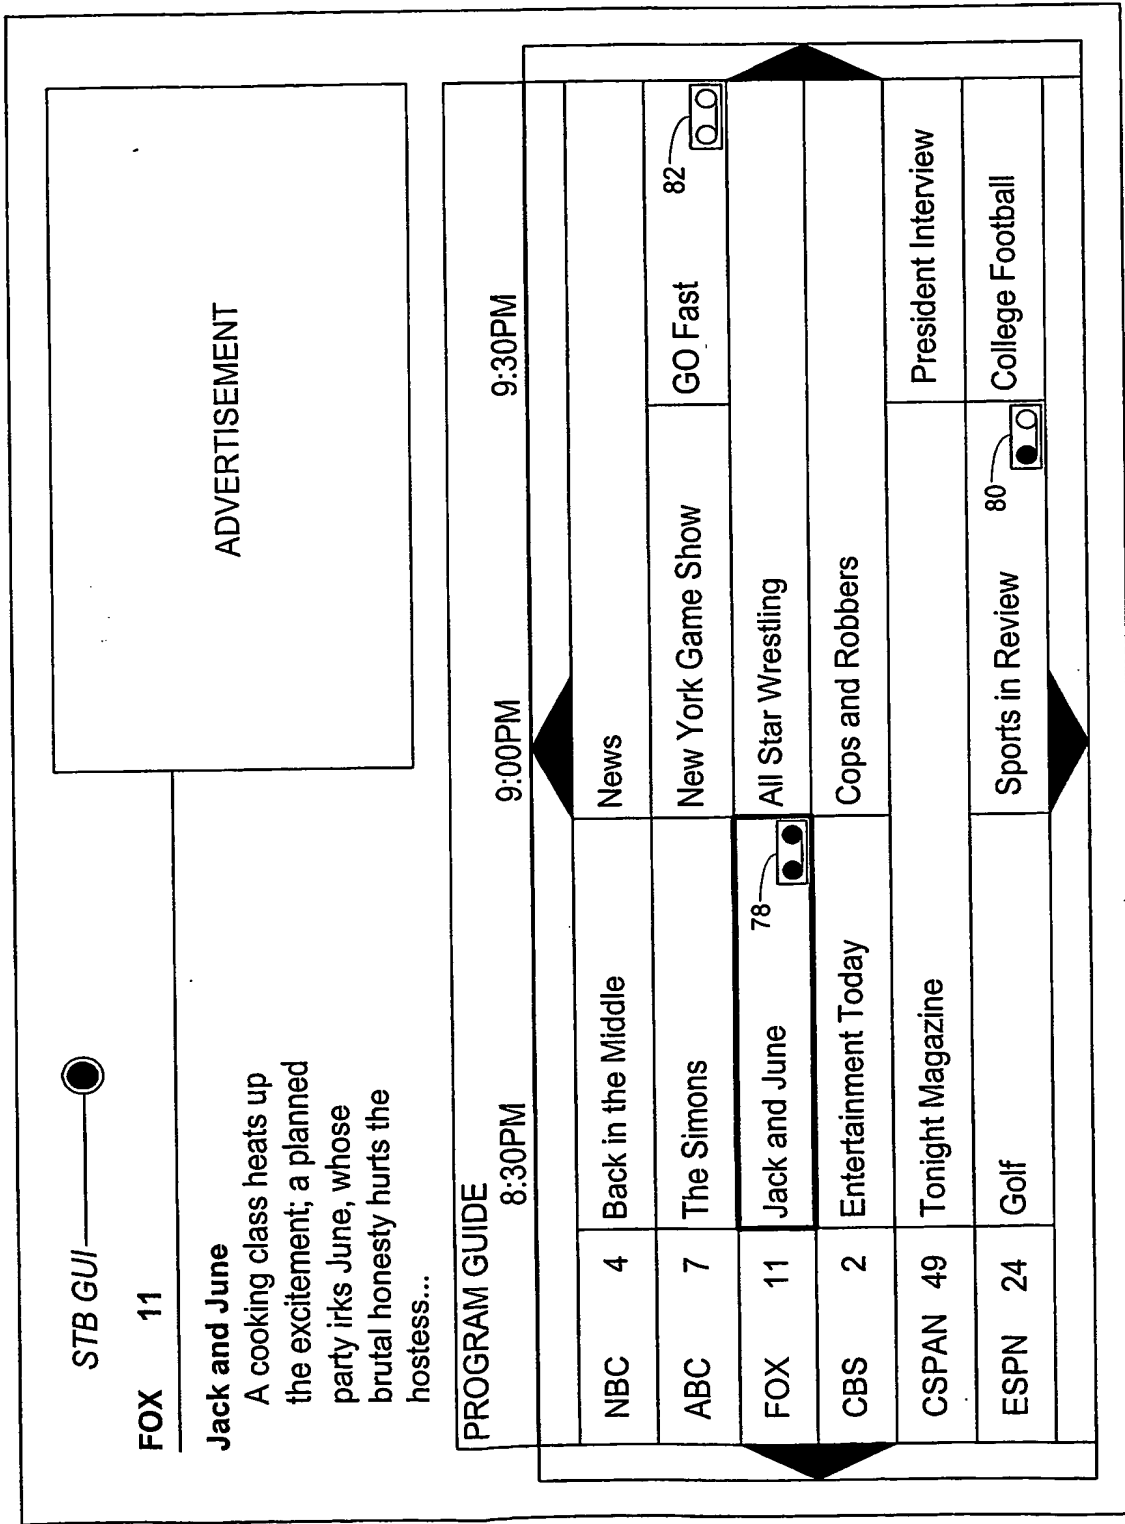


FIG. 7A

12/13

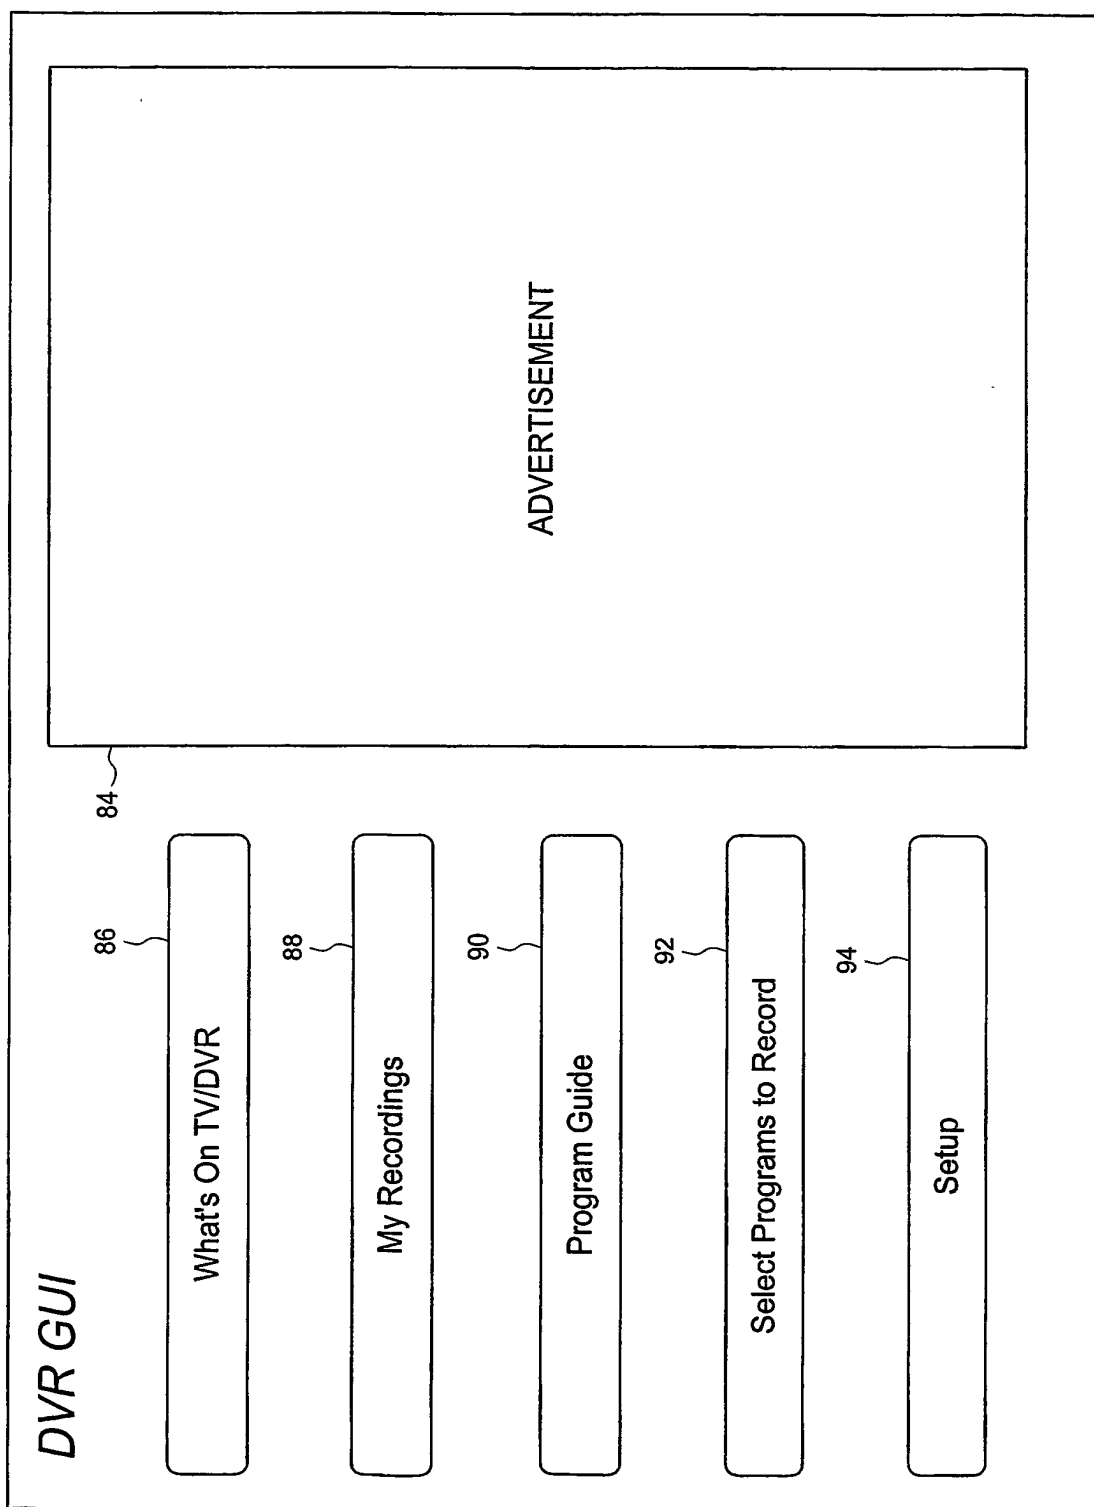


FIG. 7B

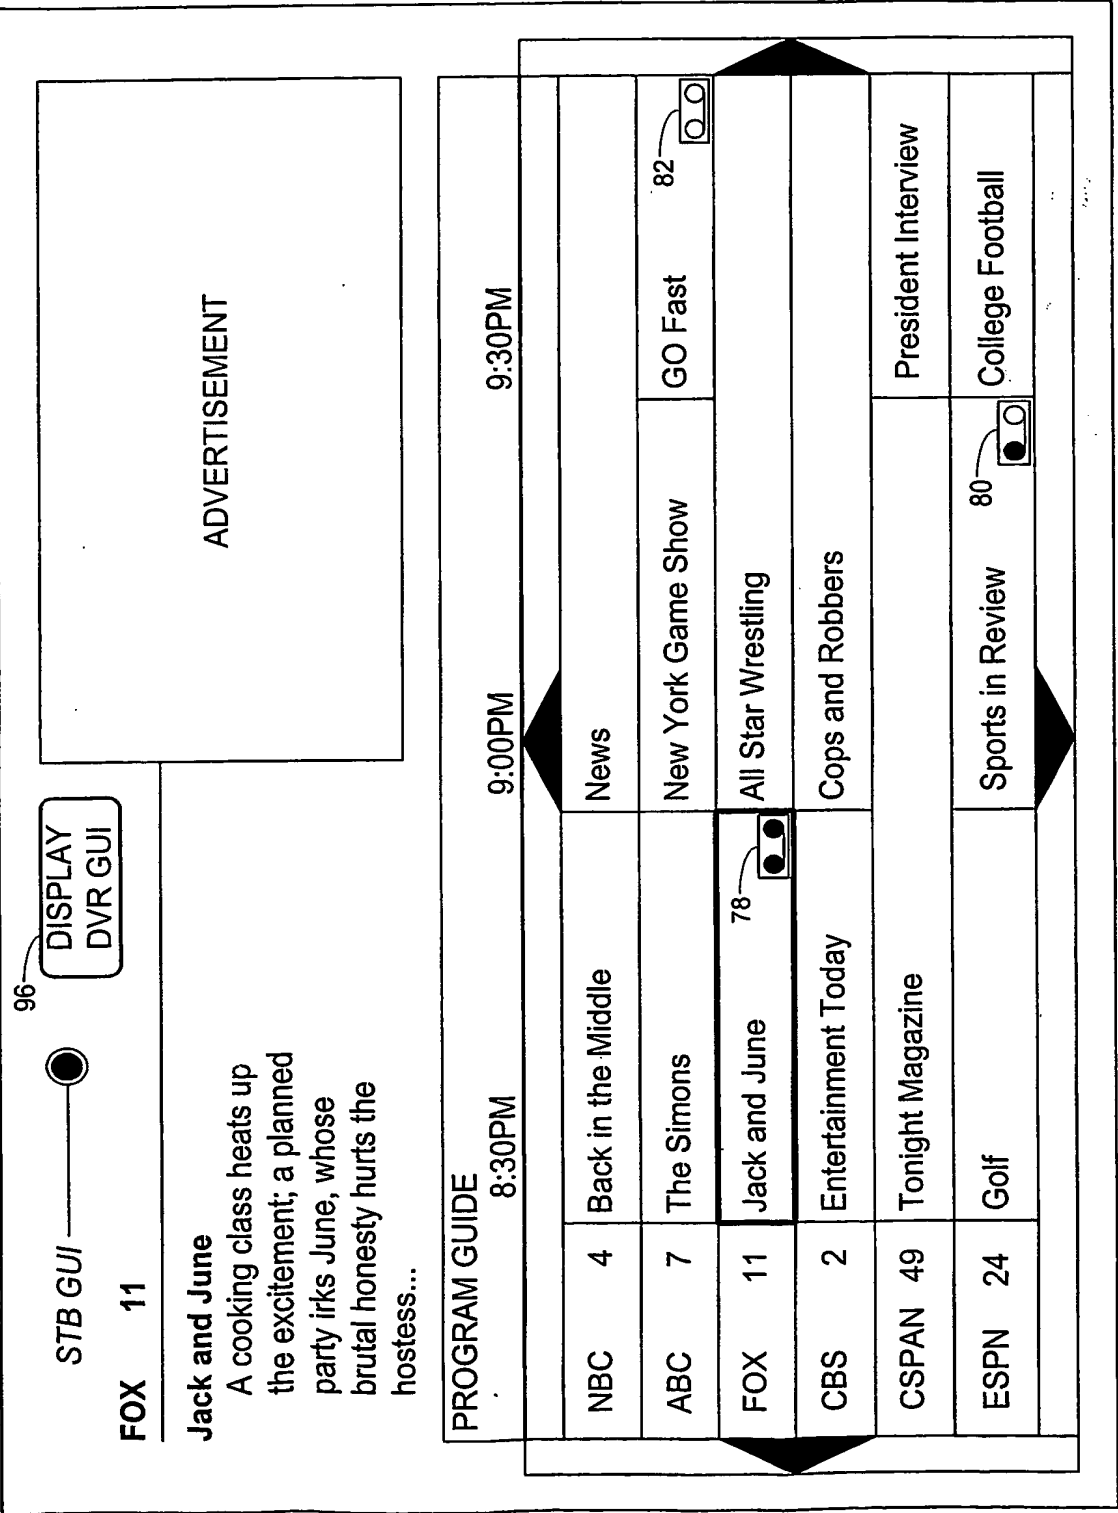


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/29631

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H04N 5/91, 5/445, 7/16, 7/173; G06F 3/00, 13/00

US CL : 386/83; 348/906; 725/45, 46, 47, 131, 133, 139, 141, 151, 153

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 386/83; 348/906; 725/45, 46, 47, 131, 133, 139, 141, 151, 153

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,550,576 A (KLOSTERMAN) 27 August 1996 (27.08.1996), col. 4, lines 26-31, {Recorder & Coordinator in one unit}	1-10
A	US 6,292,624 B1 (SAIB et al.) 18 September 2001 (18.09.2001), Fig. 3	1-10
A	US 5,850,218 A (LAJOIE et al.) 15 December 1998 (15.12.1998)	1-10
A	US 5,594,509 A (FLORIN et al.) 14 January 1997 (14.01.1997), Fig. 1	1-10
Y	US 5,479,266 A (YOUNG et al.) 26 December 1995 (15.12.1995), Fig. 22 A	1-10

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

06 November 2002 (06.11.2002)

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks

Box PCT

Washington, D.C. 20231

Facsimile No. (703)305-3230

Date of mailing of the international search report

11 DEC 2002

Authorized officer

Vincent F. Boccia

Telephone No. 703-305-4700

Form PCT/ISA/210 (second sheet) (July 1998)